



Klargester Washdown and Silt Units



Klargester Washdown and Silt units can be used in areas such as car wash and other cleaning facilities that discharge directly into a foul drain, which feeds to a municipal treatment facility.

These units can be used to serve vehicle wash down areas and car wash facilities, although it should be noted that the prime function of such separators is for the removal of silt. Typical locations using wash down separators are: car wash, tool hire depots, truck cleansing and construction compounds cleansing points.

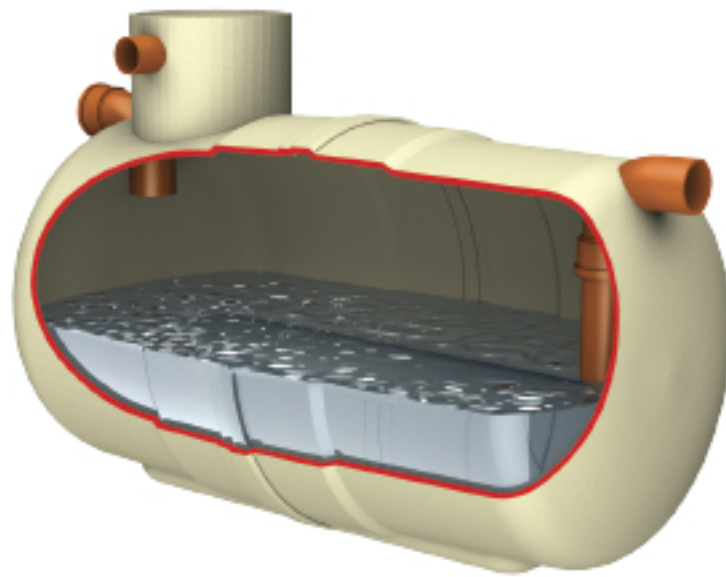

Key Features



Made from GRP - strong and durable for ultimate reliability.



Robust and simple to install, reducing on site installation time.



Lower excavation costs, less soil disposal and less backfill material required. Light, watertight and chemically resistant.



Robust and weather proof for guaranteed durability, giving you value for money.



The units are delivered complete with inlet and outlet pipework as well as factory fitted access shafts to ensure quick and easy installation on site.