



FA polypropylene wound thread

Sediment filtration.
Average life-span: 3-6 months.
Maintenance: none.

WORKING CONDITIONS

Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS


Non-toxic materials, suitable for drinking water.
 Filter medium: polypropylene thread.
 Inner core: polypropylene.

A very wide range of filter cartridges made with polypropylene thread wound on polypropylene or reinforced polypropylene inner core, available in a variety of filter rates, heights, diameters and configurations. Wound thread cartridges are a standard as heavy-duty sediment filter to remove scale, sand, lime, rust and other fines for filtration and pre-filtration in residential, commercial, industrial, municipal and other specialized applications.

Atlas Filtri FA wound cartridges are made of uniform and consistent polypropylene thread, strong and homogeneous, which makes a compact cartridge construction resulting in a larger filtration surface with improvement in filtration efficiency and in life-span, with a higher cost/effective ratio as a result.

The inner core is made rigid and with particular solutions to achieve the maximum rigidity for every height from 4" to 40". FA cartridges are made to comply with the most stringent regulations for applications in drinking water.

Polypropylene is suitable to many industrial applications due to its wide chemical-physical compatibility to a variety of water based solutions

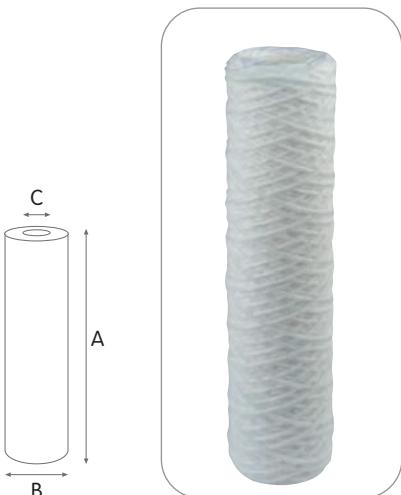

FA SX

WOULD POLYPROPYLENE THREAD CARTRIDGES WITH DOUBLE OPEN END (DOE)

CODE	MODEL	NOMINAL HEIGHT	NOMINAL FILTRATION MICRON	RECOMMENDED FLOW RATE l/h	DIMENSIONS MM
		A	B	C	
OD 1,77" x ID 0,71"					
RE5110408	FA MIGNON SX 5 mcr	5" M	5	500	122 45 18
RE5110409	FA MIGNON SX 10 mcr	5" M	10	500	122 45 18
RE5110411	FA MIGNON SX 25 mcr	5" M	25	500	122 45 18
RE5110414	FA MIGNON SX 50 mcr	5" M	50	500	122 45 18
RE5110419	FA MIGNON SX 100 mcr	5" M	100	500	122 45 18
OD 2,20" x ID 1,10"					
RE5125408	FA 10 R SX 5 mcr	10"	5	1500	250 56 28
RE5125409	FA 10 R SX 10 mcr	10"	10	1500	250 56 28
RE5125411	FA 10 R SX 25 mcr	10"	25	1500	250 56 28
RE5125414	FA 10 R SX 50 mcr	10"	50	1500	250 56 28
OD 2,40" x ID 1,10"					
RE5111406	FA 4 SX 1 mcr	4"	1	800	103 61 28
RE5111408	FA 4 SX 5 mcr	4"	5	800	103 61 28
RE5111409	FA 4 SX 10 mcr	4"	10	800	103 61 28
RE5111411	FA 4 SX 25 mcr	4"	25	800	103 61 28
RE5111414	FA 4 SX 50 mcr	4"	50	800	103 61 28
RE5111419	FA 4 SX 100 mcr	4"	100	800	103 61 28
RE51114206	FA 5 SX 1 mcr	5"	1	1000	125 61 28
RE51114208	FA 5 SX 5 mcr	5"	5	1000	125 61 28
RE51114209	FA 5 SX 10 mcr	5"	10	1000	125 61 28
RE51114211	FA 5 SX 25 mcr	5"	25	1000	125 61 28
RE51114214	FA 5 SX 50 mcr	5"	50	1000	125 61 28
RE51114219	FA 5 SX 100 mcr	5"	100	1000	125 61 28
RE51114406	FA 7 SX 1 mcr	7"	1	1400	173 61 28
RE51114408	FA 7 SX 5 mcr	7"	5	1400	173 61 28
RE51114409	FA 7 SX 10 mcr	7"	10	1400	173 61 28
RE51114411	FA 7 SX 25 mcr	7"	25	1400	173 61 28
RE51114414	FA 7 SX 50 mcr	7"	50	1400	173 61 28
RE51114419	FA 7 SX 100 mcr	7"	100	1400	173 61 28
RE51115406	FA 10 SX 1 mcr	10"	1	2000	250 61 28
RE51115408	FA 10 SX 5 mcr	10"	5	2000	250 61 28
RE51115409	FA 10 SX 10 mcr	10"	10	2000	250 61 28
RE51115411	FA 10 SX 25 mcr	10"	25	2000	250 61 28
RE51115414	FA 10 SX 50 mcr	10"	50	2000	250 61 28
RE51115419	FA 10 SX 100 mcr	10"	100	2000	250 61 28
RE51117406	FA 20 SX 1 mcr	20"	1	3000	505 61 28
RE51117408	FA 20 SX 5 mcr	20"	5	3000	505 61 28
RE51117409	FA 20 SX 10 mcr	20"	10	3000	505 61 28
RE51117411	FA 20 SX 25 mcr	20"	25	3000	505 61 28
RE51117414	FA 20 SX 50 mcr	20"	50	3000	505 61 28
RE51117419	FA 20 SX 100 mcr	20"	100	3000	505 61 28
RE51118406	FA 30 SX 1 mcr	30"	1	4000	755 61 28
RE51118408	FA 30 SX 5 mcr	30"	5	4000	755 61 28
RE51118409	FA 30 SX 10 mcr	30"	10	4000	755 61 28
RE51118411	FA 30 SX 25 mcr	30"	25	4000	755 61 28
RE51118414	FA 30 SX 50 mcr	30"	50	4000	755 61 28
RE51118419	FA 30 SX 100 mcr	30"	100	4000	755 61 28
RE51119406	FA 40 SX 1 mcr	40"	1	5000	1015 61 28
RE51119408	FA 40 SX 5 mcr	40"	5	5000	1015 61 28
RE51119409	FA 40 SX 10 mcr	40"	10	5000	1015 61 28
RE51119411	FA 40 SX 25 mcr	40"	25	5000	1015 61 28
RE51119414	FA 40 SX 50 mcr	40"	50	5000	1015 61 28
RE51119419	FA 40 SX 100 mcr	40"	100	5000	1015 61 28

FA cartridges are available in a variety of:

CONFIGURATIONS:

- SX standard configuration double open end (DOE) available for every height and diameter.
- BX proprietary configuration with double o-ring collar 45 mm, suitable to PLUS 3P BX housings, DP housings, K DP housings.

MODELS:

- FA MIGNON series 5" M, OD 1.77" ID 0.71". SX configuration
- FA-R series 10", OD 2.20", ID 1.10". SX configuration
- FA series from 4" to 40", OD 2.40", ID 1.10". SX, BX configurations

VARIANTS AVAILABLE ON MINIMUM QUANTITY:

- FA CX with double o-ring collar 57 mm, suitable to PLUS 3P CX, K DP housings.

CERTIFICATIONS



FA 10 SX 25 mcr cartridges are tested and certified by WQA against NSF/ANSI 61 Drinking Water Systems Components - Health Effects.



FA cartridges are tested and certified under the most stringent procedures worldwide, in compliance with DM 25 (Italy), EAC (Russia) and with the sanitary certification ACS (France).